

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 05-127179

(43)Date of publication of application : 25.05.1993

(51)Int.Cl. G02F 1/1339
G02F 1/13

(21)Application number : 03-315509

(71)Applicant : RICOH CO LTD

(22)Date of filing : 01.11.1991

(72)Inventor : FUJIMURA HIROSHI


(54) PRODUCTION OF LIQUID CRYSTAL DISPLAY ELEMENT

(57)Abstract:

PURPOSE: To easily produce the liquid crystal display element having a uniform gap by printing the circumference of a substrate having transparent electrodes to a frame shape with a sealing material, dropping a liquid crystal onto the surface on a transparent electrode side and spraying spacer materials.

CONSTITUTION: An oriented film is formed on one sheet of a substrate provided with the transparent electrodes and is subjected to a rubbing treatment. The sealing material 2 is printed by using a UV curing type adhesive on the other substrate 1. A liquid crystal material 4 is dropped to the inside surface of this seal. The spacer materials 7 consisting of a spherical resin are sprayed by using a spacer spraying device 5 onto the substrate 1 dropped with the liquid crystal. The spacer materials 7 can be sprayed by measuring the prescribed amt. thereof and blowing the spacer materials out of a

spraying nozzle 6 by compressed air, etc. After the spacer materials 7 are sprayed, the substrate to be disposed opposite is placed thereon from above and a uniform pressure is applied on the substrate; thereafter, the sealing material 2 is irradiated with UV rays, by which the sealing material can be cured. The movement and flocculation of the spacer materials 7 in the liquid crystal are prevented and the uniform gap is formed by spraying the spacer materials 7 after dropping of the liquid crystal in such a manner.

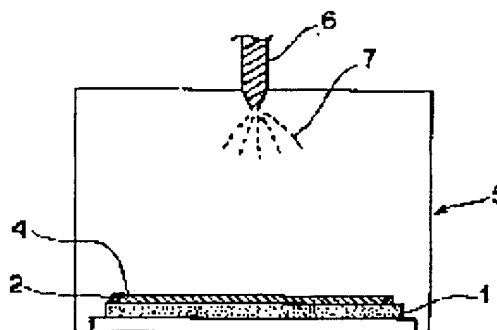

LEGAL STATUS

[Date of request for examination]

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or

BEST AVAILABLE COPY